

002290" ST420960

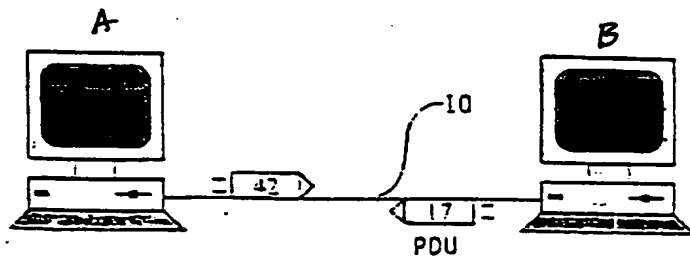


Fig. 1

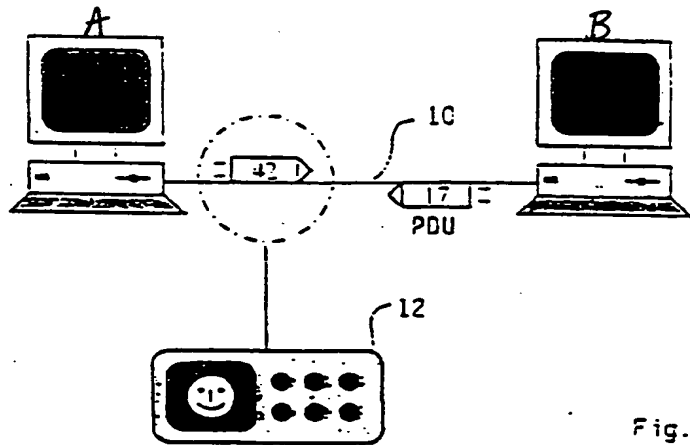


Fig. 2

002290 ST 420960

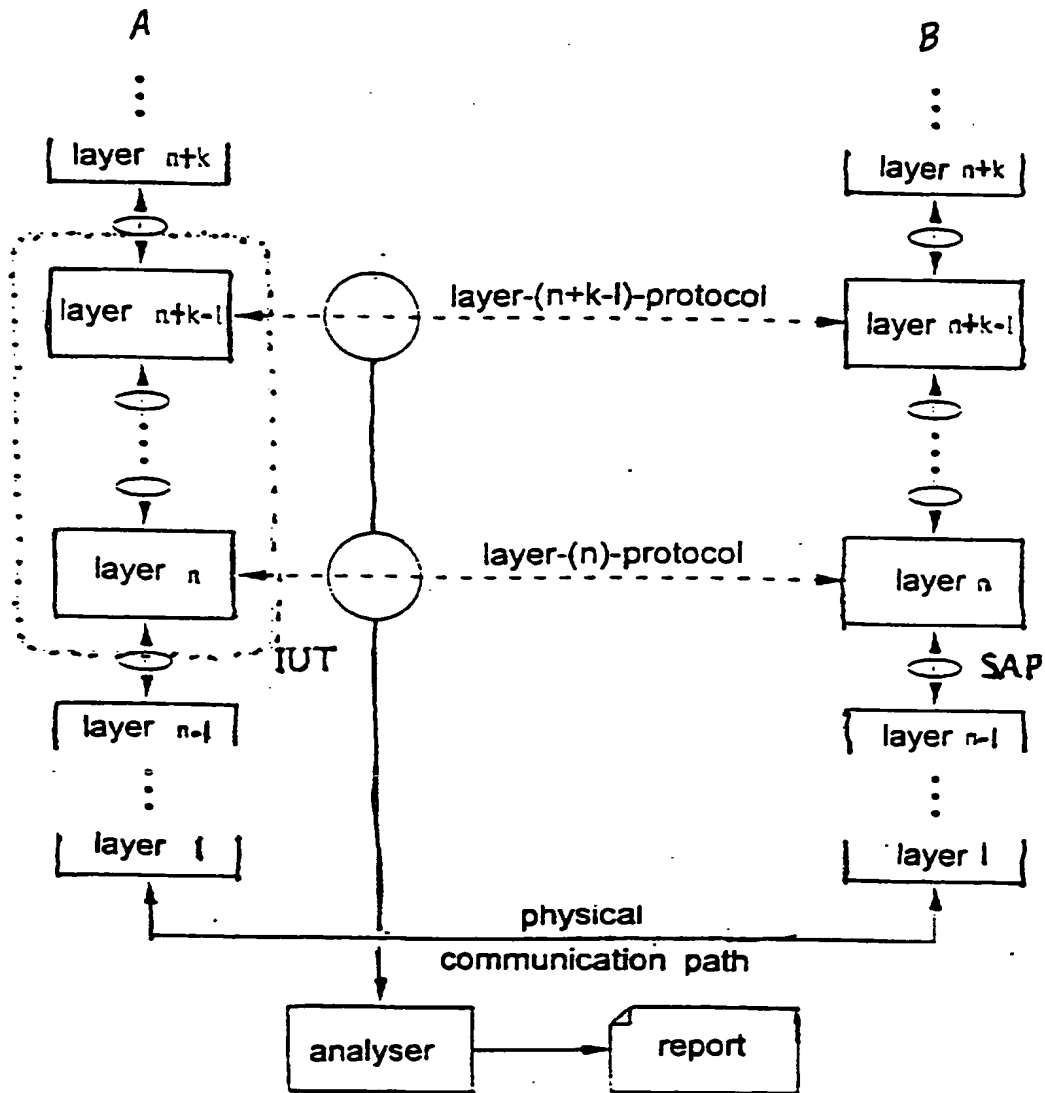


Fig 3

002290" 87420900

a (x,y)

| Byte | |
|--------|-------------------|
| 1 - 2 | 42 (ACK) |
| 3 - 6 | tel. no. receiver |
| 7 - 10 | tel. no. sender |

a

x

y

Fig. 4

a b a b a c b a c b a b a b a
 1 2 3 4 5 6 7 8 9 10 11 12 13 14

Fig. 5

| | 1 | 2 | 3 | 4 | 5 |
|---|----------|----------|----------|----------|----------|
| 1 | ∞ | 0 | 3 | 0 | ① ← ③ |
| 2 | 0 | ∞ | 0 | 3 | 0 |
| 3 | 3 | 0 | ∞ | 0 | 3 |
| 4 | 0 | 3 | 0 | ∞ | 0 |
| 5 | ② ↑ ③ | 0 | 3 | 0 | ∞ |

Fig. 6

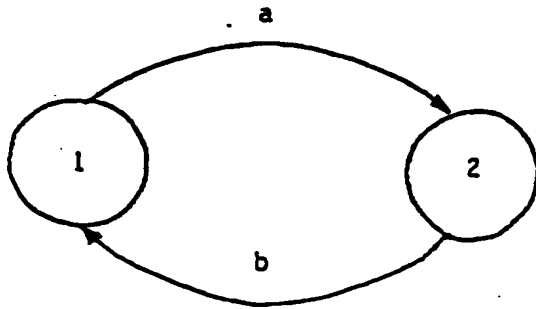


Fig. 7

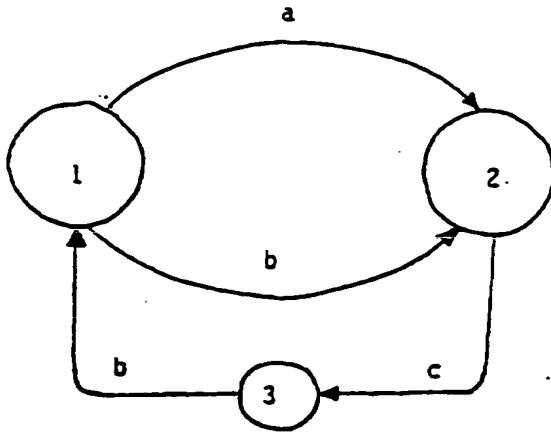


Fig. 8

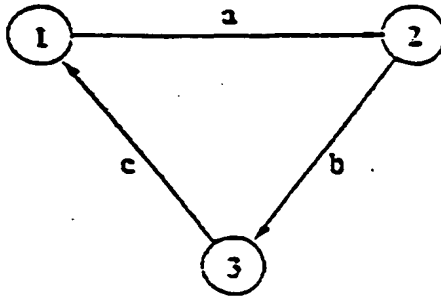


Fig. 9




Fig. 10

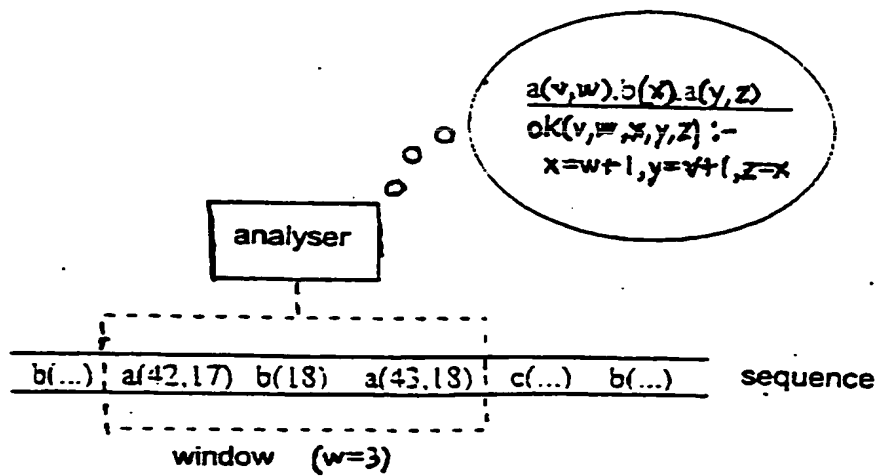


Fig. 11

002290" BT420960

| v | w | x | y | z | y - v | x - z |
|-----|-----|-----|-----|-----|-------|-------|
| 42 | 17 | 18 | 43 | 18 | 1 | 0 |
| 100 | 307 | 308 | 101 | 308 | 1 | 0 |
| ⋮ | ⋮ | ⋮ | ⋮ | ⋮ | ⋮ | ⋮ |

Fig. 12

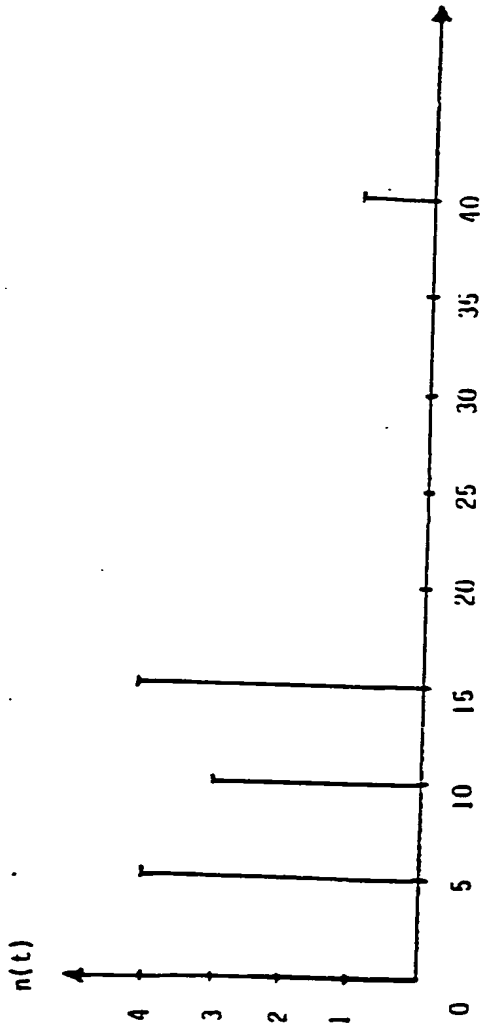


Fig. 13